

Features

- Low power consumption
- Low voltage drop
- Low temperature coefficient
- Ultra low quiescent current: 2μA(typ.)
- High input voltage (up to 24V)
- Maximum output current: 300mA
- Output voltage accuracy: tolerance ±2%
- TO92, SOT89, SOT23-3 and SOT23 package

Applications

- Battery-powered equipment
- Communication equipment
- Audio/Video equipment

General Description

The HM73XXH series is a set of three-terminal low power high voltage regulators implemented in CMOS technology. They allow input voltages as high as 24V. The series features extremely low quiescent current which is typically 2μA. They are available with several fixed output voltages ranging from 1.8V to 5.0V. CMOS technology ensures low voltage drop and low quiescent current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain variable voltages and currents.

Selection Table


| Part No. | Output Voltage | Package | Marking |
|----------|----------------|-----------------------------------|---------|
| HM733: H | 1.8V | TO92 SOT89 SOT23-3 SOT23 | |
| HM7347H | 2.5V | | |
| HM7349H | 2.7V | | |
| HM7352H | 3.0V | | |
| HM7355H | 3.3V | | |
| HM7358H | 3.5V | | |
| HM7362H | 4.0V | | |
| HM7366H | 4.4V | | |
| HM7372H | 5.0V | | |

Order Information

HM73①②<!③④


| Designator | Symbol | Description |
|------------|---------|--------------------------|
| ① ② | Integer | Output Voltage(1.8~5.0V) |
| ③ | T | Package:TO-92 |
| | P | Package:SOT89-3 |
| | M | Package:SOT23-3 |
| | N | Package:SOT23 |
| ④ | R | RoHS / Pb Free |
| | G | Halogen Free |

Block Diagram

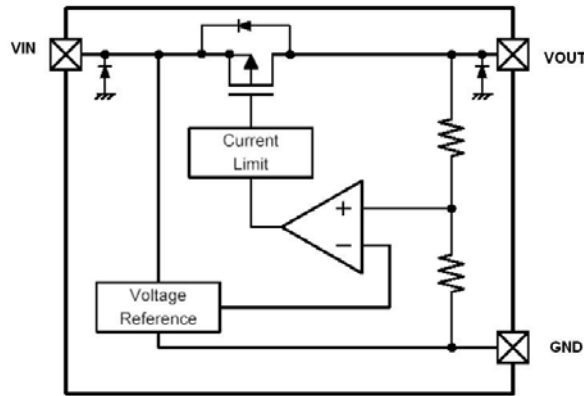

*Diodes inside the circuit are an ESD protection diode and a parasitic diode.

Pin Assignment

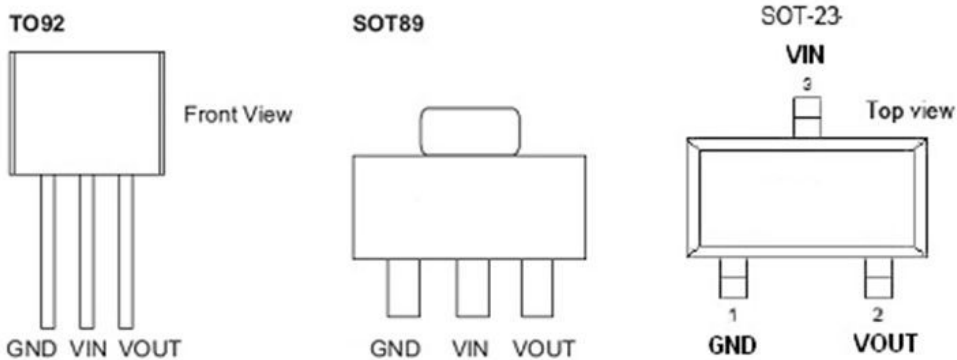

Absolute Maximum Ratings

Supply Voltage-0.3V to 24V Storage Temperature-50°C to 125°C
 Operating Temperature-30°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Thermal Information

| Symbol | Parameter | Package | Max. | Unit |
|---------------|--|---------|------|------|
| θ_{JA} | Thermal Resistance (Junction to Ambient) (Assume no ambient airflow, no heat sink) | SOT23 | 500 | °C/W |
| | | SOT89 | 200 | °C/W |
| | | TO92 | 200 | °C/W |
| P_D | Power Dissipation | SOT23 | 0.20 | W |
| | | SOT89 | 0.50 | W |
| | | TO92 | 0.50 | W |

Note: P_D is measured at $T_a = 25^\circ\text{C}$

Electrical Characteristics

HM73& H, +2.5V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|---|------|-------|------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 5.5V | I _{OUT} =40mA | 2.45 | 2.500 | 2.55 | V |
| I _{OUT} | Output Current | 5.5V | - | 180 | 250 | - | mA |
| ΔV _{OUT} | Load Regulation | 5.5V | 1mA ≤ I _{OUT} ≤ 60mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 100 | - | mV |
| I _{SS} | Current Consumption | 5.5V | No load | - | 2.5 | 3 | μA |
| $\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$ | Line Regulation | - | 3.5V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 5.5V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73& H, +2.8V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|--|-------------------------|-----------------|---|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 5.8V | I _{OUT} =10mA | 2.774 | 2.800 | 2.856 | V |
| I _{OUT} | Output Current | 5.8V | - | 200 | 250 | - | mA |
| ΔV _{OUT} | Load Regulation | 5.8V | 1mA ≤ I _{OUT} ≤ 60mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 100 | - | mV |
| I _{SS} | Current Consumption | 5.8V | No load | - | 2.5 | 3 | μA |
| $\frac{V_{OUT}}{V_{IN} \cdot V_{OUT}}$ | Line Regulation | - | 3.8V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 5.8V | I _{OUT} =10mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73' \$H, +3.0V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|------|------|------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 6V | I _{OUT} =40mA | 2.94 | 3.00 | 2.06 | V |
| I _{OUT} | Output Current | 6V | - | 250 | - | - | mA |
| ΔV _{OUT} | Load Regulation | 6V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 100 | - | mV |
| I _{SS} | Current Consumption | 6V | No load | - | 2.5 | 3 | μA |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 4V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 6V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73' ' H, +3.3V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 6.3V | I _{OUT} =40mA | 3.234 | 3.300 | 3.366 | V |
| I _{OUT} | Output Current | 6.3V | - | 250 | - | - | mA |
| ΔV _{OUT} | Load Regulation | 6.3V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 100 | - | mV |
| I _{SS} | Current Consumption | 6.3V | No load | - | 2.5 | 3 | μA |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 4.3V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 6.3V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73' * H, +3.6V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 6.6V | I _{OUT} =40mA | 3.528 | 3.600 | 3.672 | V |
| I _{OUT} | Output Current | 6.6V | - | 250 | - | - | mA |
| ΔV _{OUT} | Load Regulation | 6.6V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 80 | - | mV |
| I _{SS} | Current Consumption | 6.6V | No load | - | 2.5 | 3.0 | μA |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 4.6V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 6.6V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73(\$H, +4.0V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 7.0V | I _{OUT} =40mA | 3.920 | 4.000 | 4.080 | V |
| I _{OUT} | Output Current | 7.0V | - | 250 | - | - | mA |
| ΔV _{OUT} | Load Regulation | 7.0V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, ΔV _{OUT} =2% | - | 80 | - | mV |
| I _{SS} | Current Consumption | 7.0V | No load | - | 2.5 | 3.0 | μA |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 5V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 7.0V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73((H, +4.4V Output Type

| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|-------|-------|-------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 7.4V | I _{OUT} =40mA | 4.312 | 4.400 | 4.488 | V |
| I _{OUT} | Output Current | 7.4V | - | 250 | - | - | mA |
| Δ V _{OUT} | Load Regulation | 7.4V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, Δ V _{OUT} =2% | - | 80 | - | mV |
| I _{SS} | Current Consumption | 7.4V | No load | - | 2.5 | 3.0 | μ A |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 5.4V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 7.4V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |


Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

HM73) \$H, +5.0V Output Type


| Symbol | Parameter | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------------------------------|-------------------------|-----------------|---|------|------|------|-------|
| | | V _{IN} | Conditions | | | | |
| V _{OUT} | Output Voltage | 8V | I _{OUT} =40mA | 4.9 | 5.00 | 5.1 | V |
| I _{OUT} | Output Current | 8V | - | 250 | - | - | mA |
| Δ V _{OUT} | Load Regulation | 8V | 1mA ≤ I _{OUT} ≤ 80mA | - | 45 | 90 | mV |
| V _{DIF} | Voltage Drop(Note) | - | I _{OUT} =40mA, Δ V _{OUT} =2% | - | 80 | - | mV |
| I _{SS} | Current Consumption | 8V | No load | - | 2.5 | 3.0 | μ A |
| $\frac{V_{OUT}}{V_{IN} - V_{OUT}}$ | Line Regulation | - | 6V ≤ V _{IN} ≤ 12V I _{OUT} =40mA | - | 0.2 | - | %/V |
| V _{IN} | Input Voltage | - | - | - | - | 15 | V |
| $\frac{V_{OUT}}{T_a}$ | Temperature Coefficient | 8V | I _{OUT} =40mA -40°C < T _a < 85°C | - | ±0.5 | - | mV/°C |

Note: Dropout voltage is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at V_{IN} = V_{OUT}+1V with a fixed load.

Application Circuits
Basic Circuits

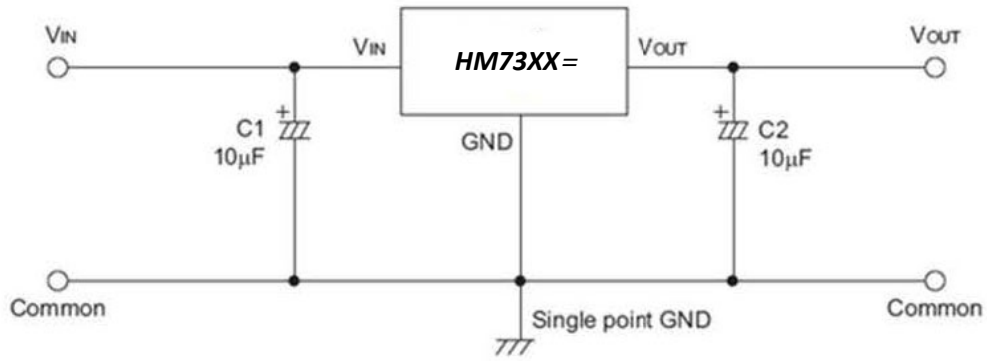


Package Information
3-pin TO92 Outline Dimensions

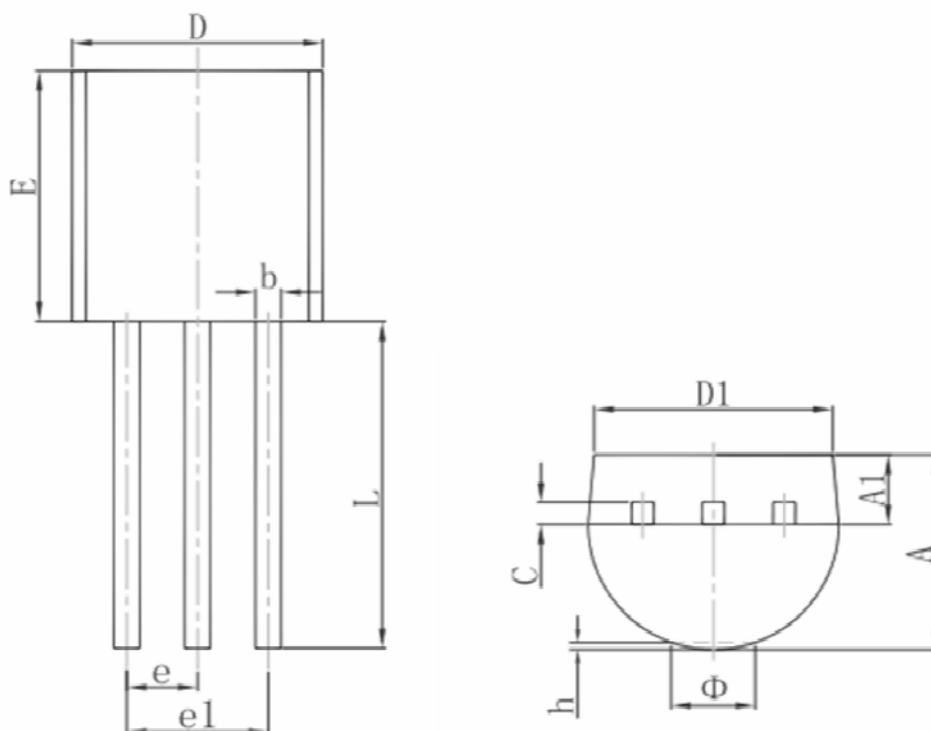


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|--------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 3.300 | 3.700 | 0.130 | 0.146 |
| A1 | 1.100 | 1.400 | 0.043 | 0.055 |
| b | 0.380 | 0.550 | 0.015 | 0.022 |
| c | 0.360 | 0.510 | 0.014 | 0.020 |
| D | 4.300 | 4.700 | 0.169 | 0.185 |
| D1 | 3.430 | | 0.135 | |
| E | 4.300 | 4.700 | 0.169 | 0.185 |
| e | 1.270 TYP. | | 0.050 TYP. | |
| e1 | 2.440 | 2.640 | 0.096 | 0.104 |
| L | 14.100 | 14.500 | 0.555 | 0.571 |
| Φ | | 1.600 | | 0.063 |
| h | 0.000 | 0.380 | 0.000 | 0.015 |

3-pin SOT89 Outline Dimensions

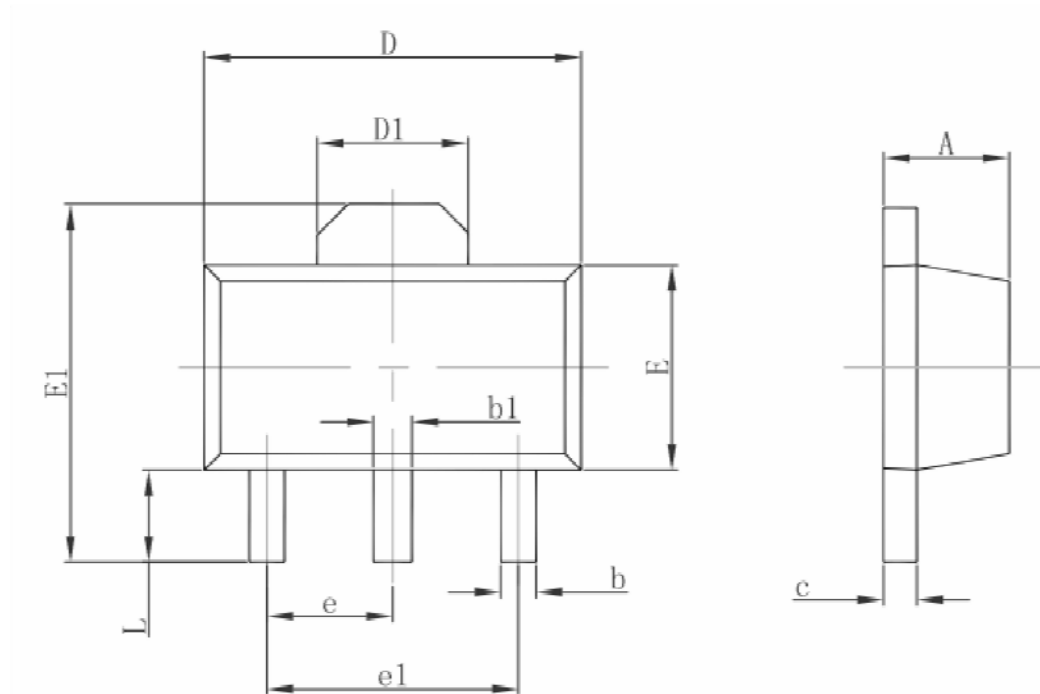


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.020 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF. | | 0.061 REF. | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP. | | 0.060 TYP. | |
| e1 | 3.000 TYP. | | 0.118 TYP. | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

3-pin SOT23-3 Outline Dimensions

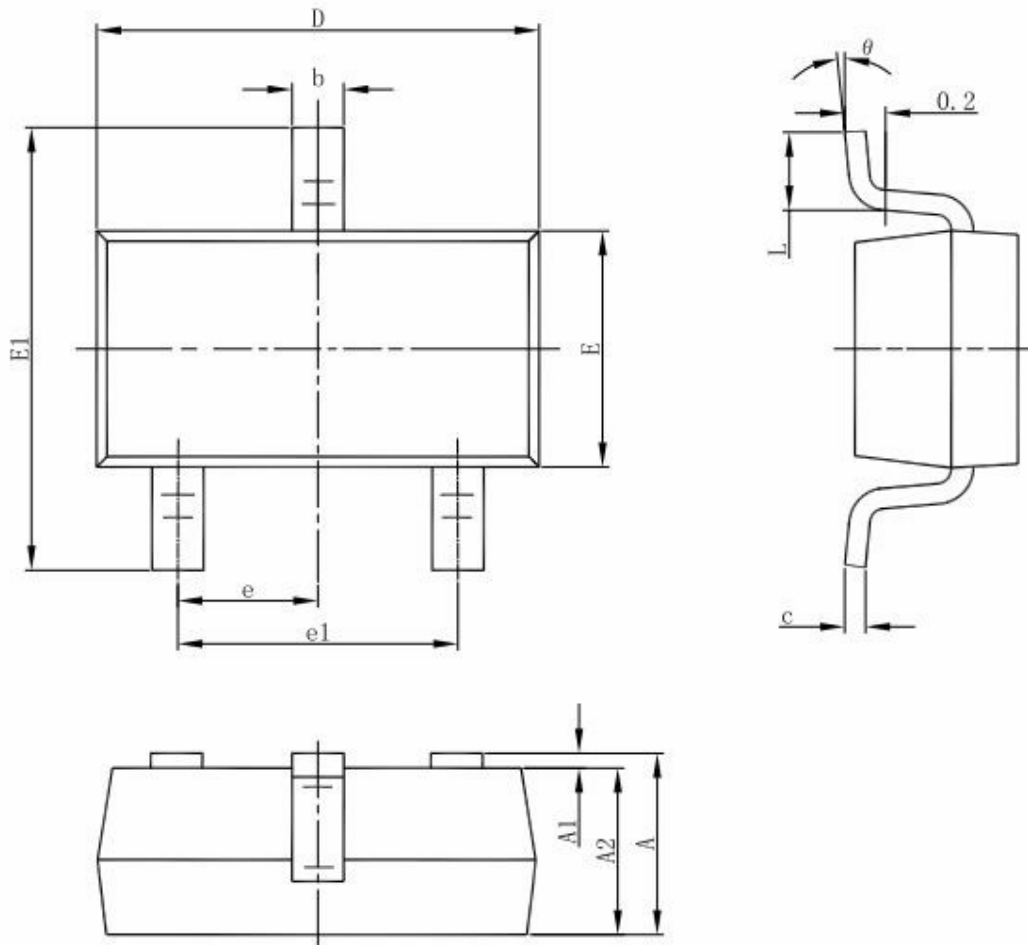


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| theta | 0° | 8° | 0° | 8° |

3-pin SOT23 Outline Dimensions

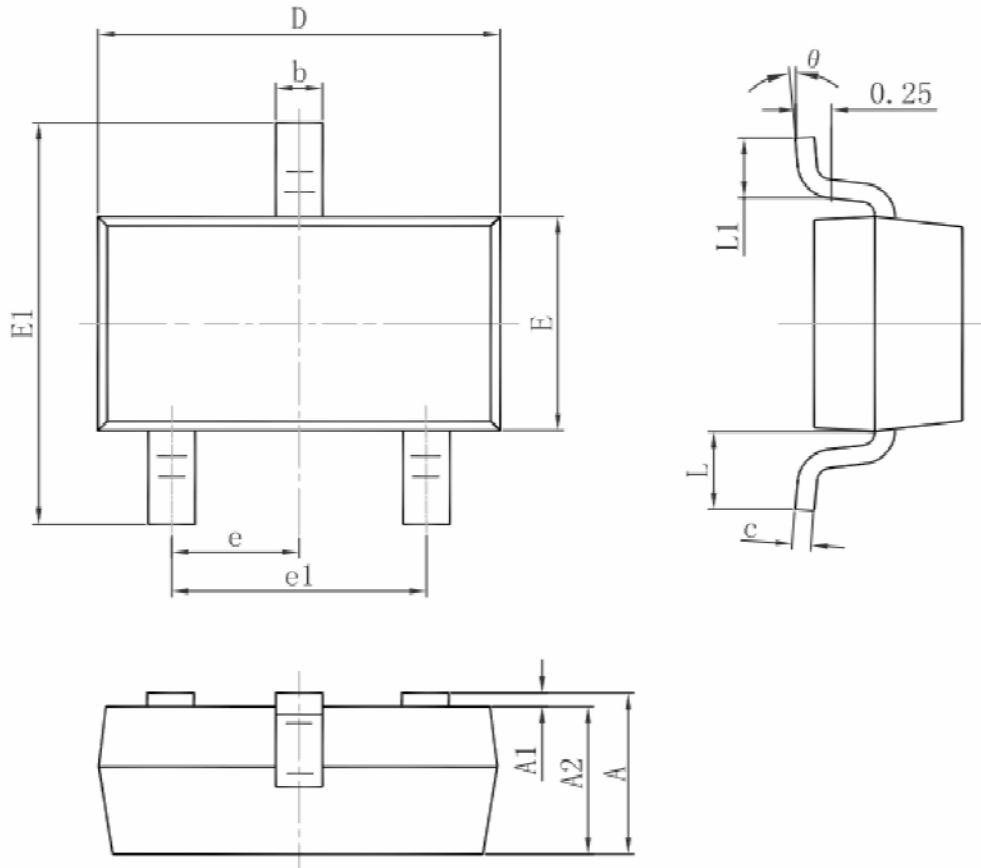


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.900 | 1.150 | 0.035 | 0.045 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.050 | 0.035 | 0.041 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 1.200 | 1.400 | 0.047 | 0.055 |
| E1 | 2.250 | 2.550 | 0.089 | 0.100 |
| e | 0.950 TYP. | | 0.037 TYP. | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.550 REF. | | 0.022 REF. | |
| L1 | 0.300 | 0.500 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |

Product Tape and Reel Specifications
3-pin TO92 Reel Dimensions (Unit: mm)

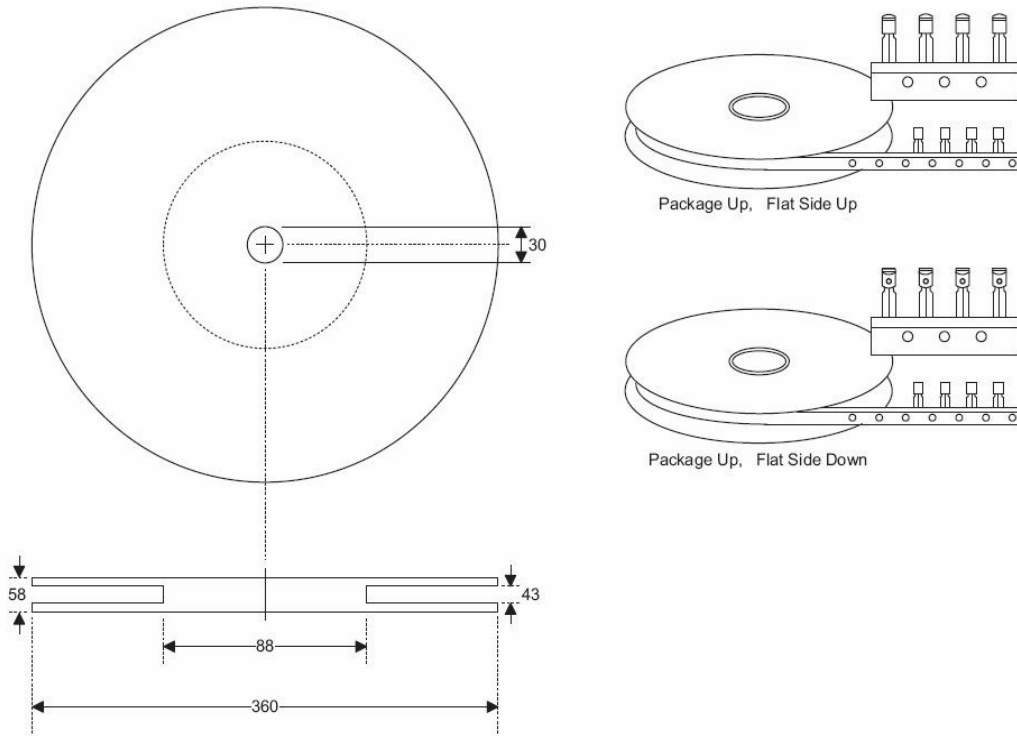

Reel Dimensions

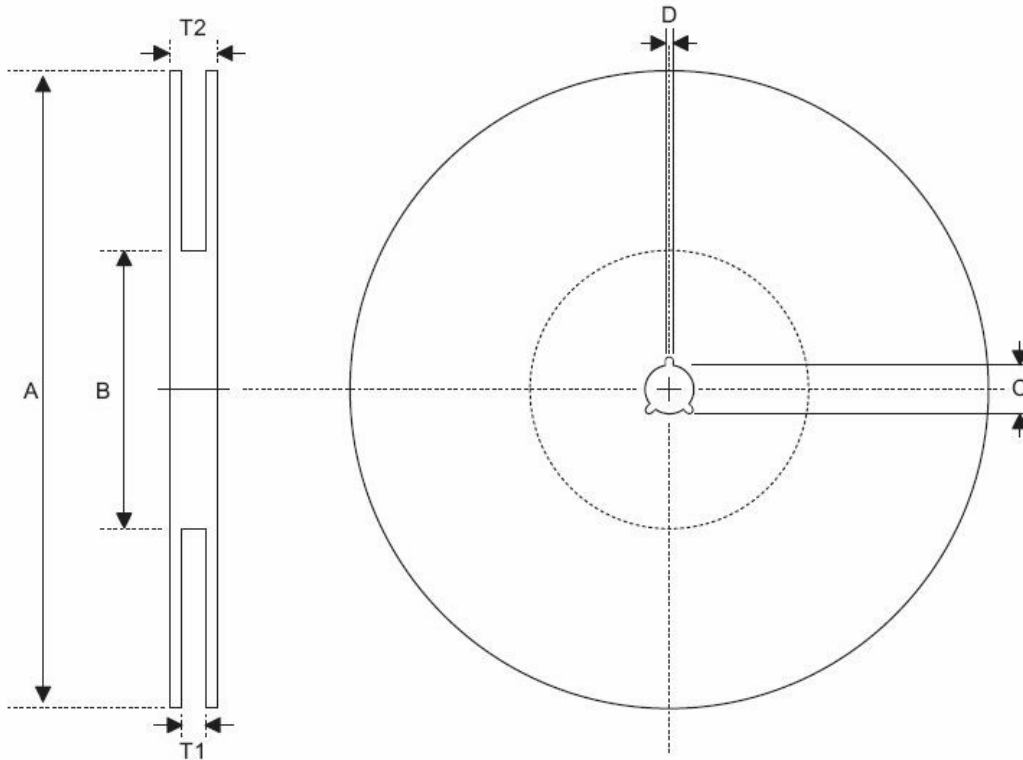


SOT89

| Symbol | Description | Dimensions in mm |
|--------|-----------------------|------------------------------|
| A | Reel Outer Diameter | 180.0±1.0 |
| B | Reel Inner Diameter | 62.0±1.5 |
| C | Spindle Hole Diameter | 12.75 ^{+0.15/-0.00} |
| D | Key Slit Width | 1.90±0.15 |
| T1 | Space Between Flange | 12.4 ^{+0.2/-0.00} |
| T2 | Reel Thickness | 17.0 ^{+0.0/-0.4} |

SOT23-5

| Symbol | Description | Dimensions in mm |
|--------|-----------------------|---------------------------|
| A | Reel Outer Diameter | 178.0±1.0 |
| B | Reel Inner Diameter | 62.0±1.0 |
| C | Spindle Hole Diameter | 13.0±0.2 |
| D | Key Slit Width | 2.50±0.25 |
| T1 | Space Between Flange | 8.4 ^{+1.5/-0.0} |
| T2 | Reel Thickness | 11.4 ^{+1.5/-0.0} |

Carrier Tape Dimensions

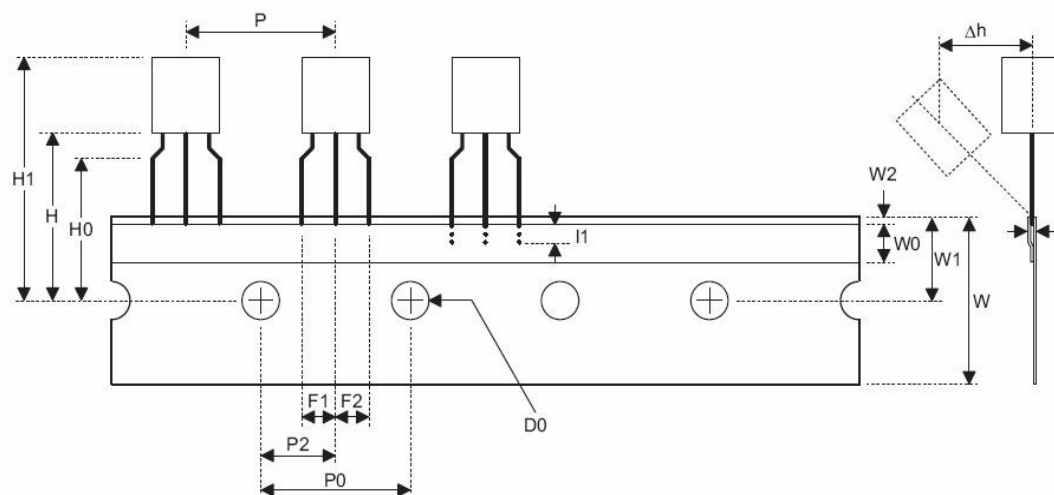

TO92


| Symbol | Description | Dimensions in mm |
|----------------|---|---------------------------|
| I1 | Taped Lead Length | (2.5) |
| P | Component Pitch | 12.7±1.0 |
| P ₀ | Perforation Pitch | 12.7±0.3 |
| P ₂ | Component to Perforation (Length Direction) | 6.35±0.40 |
| F ₁ | Lead Spread | 2.5 ^{+0.4/-0.1} |
| F ₂ | Lead Spread | 2.5 ^{+0.4/-0.1} |
| Δh | Component Alignment | 0.0±0.1 |
| W | Carrier Tape Width | 18.0 ^{+1.0/-0.5} |
| W ₀ | Hold-down Tape Width | 6.0±0.5 |
| W ₁ | Perforation Position | 9.0±0.5 |
| W ₂ | Hold-down Tape Position | (0.5) |
| H ₀ | Lead Clinch Height | 16.0±0.5 |
| H ₁ | Component Height | Less than 24.7 |
| D ₀ | Perforation Diameter | 4.0±0.2 |
| t | Taped Lead Thickness | 0.7±0.2 |
| H | Component Base Height | 19.0±0.5 |

Note: Thickness less than 0.38_0.05mm~0.5mm

P₀ Accumulated pitch tolerance: _1mm/20pitches.

() Bracketed figures are for consultation only

Carrier Tape Dimensions

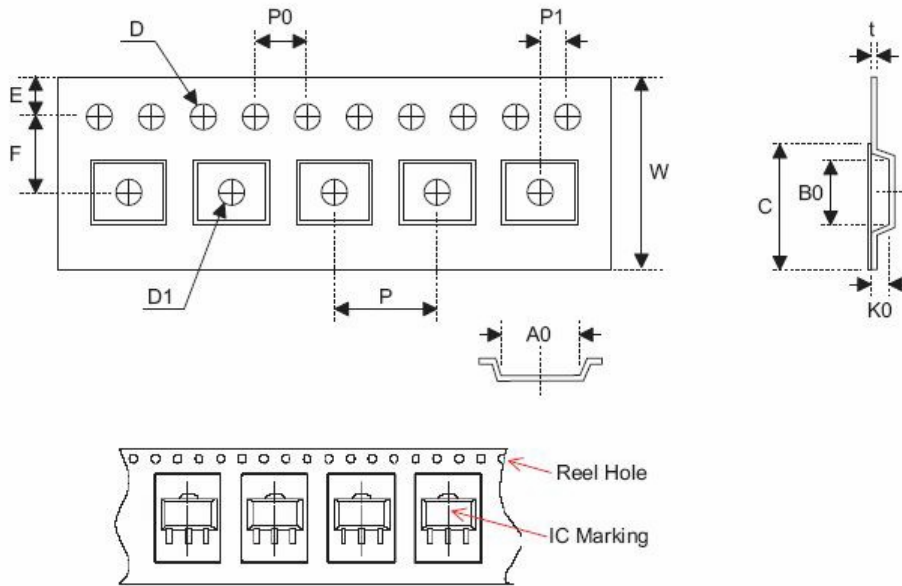

SOT89

| Symbol | Description | Dimensions in mm |
|--------|--|---------------------------|
| W | Carrier Tape Width | 12.0 ^{+0.3/-0.1} |
| P | Cavity Pitch | 8.0±0.1 |
| E | Perforation Position | 1.75±0.10 |
| F | Cavity to Perforation (Width Direction) | 5.50±0.05 |
| D | Perforation Diameter | 1.5 ^{+0.1/-0.0} |
| D1 | Cavity Hole Diameter | 1.5 ^{+0.1/-0.0} |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.0±0.1 |
| A0 | Cavity Length | 4.8±0.1 |
| B0 | Cavity Width | 4.5±0.1 |
| K0 | Cavity Depth | 1.8±0.1 |
| t | Carrier Tape Thickness | 0.300±0.013 |
| C | Cover Tape Width | 9.3±0.1 |

SOT23-5

| Symbol | Description | Dimensions in mm |
|--------|--|--------------------------|
| W | Carrier Tape Width | 8.0±0.3 |
| P | Cavity Pitch | 4.0±0.1 |
| E | Perforation Position | 1.75±0.10 |
| F | Cavity to Perforation (Width Direction) | 3.50±0.05 |
| D | Perforation Diameter | 1.5 ^{+0.1/-0.0} |
| D1 | Cavity Hole Diameter | 1.5 ^{+0.1/-0.0} |
| P0 | Perforation Pitch | 4.0±0.1 |
| P1 | Cavity to Perforation (Length Direction) | 2.00±0.05 |
| A0 | Cavity Length | 3.15±0.10 |
| B0 | Cavity Width | 3.2±0.1 |
| K0 | Cavity Depth | 1.4±0.1 |
| t | Carrier Tape Thickness | 0.20±0.03 |
| C | Cover Tape Width | 5.3±0.1 |